



1

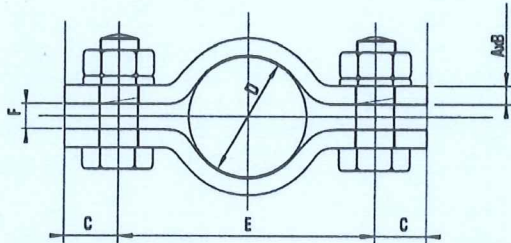

TYPE HS-10
VORM - FORME A.

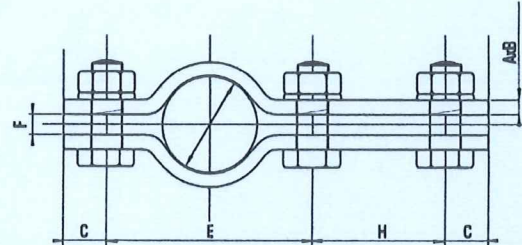

TYPE HS-11
VORM - FORME B.

ND/DN	INCH	D	AxB	C	E	F	BOUT/BOULON	H	HS10	HS11
									G/P (Kg)	
015	1/2	21.3	30x5	15	56	7	M10x30	46	0.20	0.31
020	3/4	26.9	30x5	15	66	7	M10x30	46	0.23	0.33
025	1	33.7	30x5	15	72	7	M10x30	46	0.25	0.35
032	1.1/4	42.4	30x5	15	82	7	M10x30	46	0.28	0.38
040	1.1/2	48.3	30x5	15	88	7	M10x30	46	0.30	0.41
050	2	60.3	40x6	18	108	9	M12x35	54	0.58	0.78
065	2.1/2	76.1	40x6	18	122	9	M12x35	54	0.69	0.89
080	3	88.9	40x6	18	136	9	M12x35	54	0.75	0.95
100	4	114.3	50x8	24	178	11	M16x50	70	1.63	2.07
125	5	139.7	50x8	24	204	11	M16x50	70	1.83	2.26
150	6	168.3	50x8	24	232	11	M16x50	70	2.08	2.52
200	8	219.1	50x8	24	284	11	M16x50	70	2.64	3.09
250	10	273.0	60x8	30	348	14	M20x50	86	3.91	4.52
300	12	323.9	60x8	30	398	14	M20x50	86	4.49	5.11
350	14	356.0	60x8	30	444	14	M20x50	86	5.09	5.72
400	16	407.0	70x10	36	510	18	M24x70	104	8.52	9.63
450	18	457.2	70x10	36	550	18	M24x70	104	9.17	10.31
500	20	508.0	70x10	36	614	18	M24x70	104	10.20	11.39
600	24	609.6	80x12	45	730	22	M24x70	150	17.61	19.87
700	28	711.2	80x12	45	832	22	M30x80	150	20.03	22.29
800	32	812.8	100x15	54	954	26	M36x100	150	35.95	38.48
1000	40	1016.0	100x15	54	1160	26	M36x100	150	43.53	47.06

Materiaal :

St 37.2 blank, gegalvaniseerd of RVS

Levering met of zonder bouten en moeren

Matériel :

Ac 37.2 noir, galvanisé ou inox

Livraison sans ou avec boulonnerie

Bestelvoorbeeld: blanke HS-10 beugels 2"

Exemple de commande: carcans HS-10, noir 2") 10 Z O5O

